

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
6 September 2002 (06.09.2002)

PCT

(10) International Publication Number
WO 02/068985 A2(51) International Patent Classification⁷: **G01S 5/00**(21) International Application Number: **PCT/US02/03410**

(22) International Filing Date: 27 February 2002 (27.02.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/271,764 27 February 2001 (27.02.2001) US(71) Applicant (for all designated States except US): **ITT MANUFACTURING ENTERPRISES, INC.** [US/US]; Suite 1217, 1105 North Market Street, Wilmington, DE 19801 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **BRUNO, Ronald, C.** [US/US]; 4128 Lorcom Lane, Arlington, VA 22207 (US). **SCHUCHMAN, Leonard** [US/US]; 11054-7 Hill Lane, Potomac, MD 20854 (US).(74) Agents: **LYTLE, J., Warren, Jr.** et al.; Epstein, Edell, Shapiro, Finnan & Lytle, LLC, Suite 400, 1901 Research Boulevard, Rockville, MD 20850 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— without international search report and to be republished upon receipt of that report

[Continued on next page]

(54) Title: HYBRID SYSTEM FOR POSITION DETERMINATION BY A MOBILE COMMUNICATIONS TERMINAL

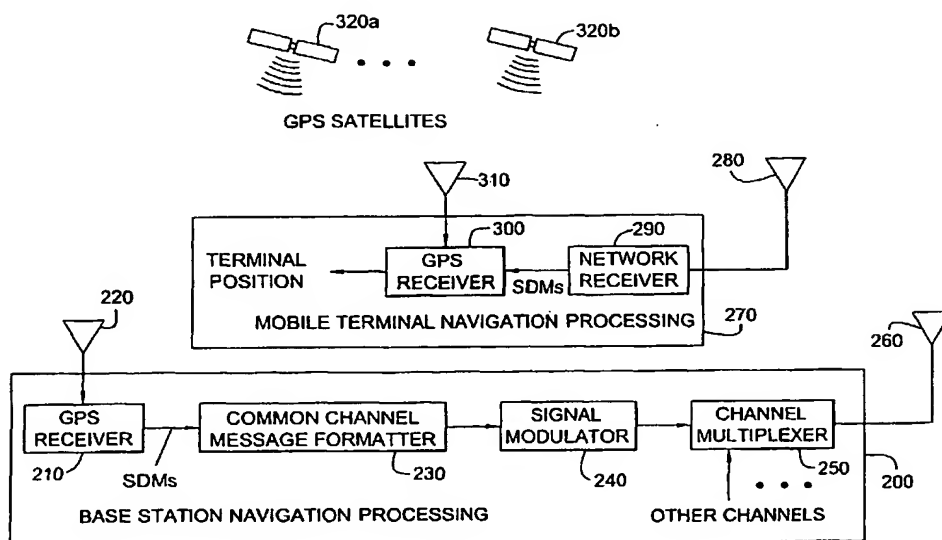

(57) Abstract: A mobile unit includes a network receiver, such as a GSM telephone, for communication with a wireless network, and a navigation receiver, such as a global positioning system (GPS) receiver for receiving navigation signals. The navigation receiver includes a vector delay lock loop (VDLL) that receives information concerning the navigation sources, such as satellite data messages, transmitted over a common broadcast channel of the wireless network, and receives navigation signals from the navigation receiver. The VDLL uses the navigation signals received from navigation sources that are not obscured and uses satellite data messages broadcast over the wireless network to track a navigation signal that is received only intermittently due, for example, to the navigation source being obscured from view of the mobile unit.

WO 02/068985 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

HYBRID SYSTEM FOR POSITION DETERMINATION BY A MOBILE COMMUNICATIONS TERMINAL

1 BACKGROUND OF THE INVENTION

2 Field of the Invention

3 The invention relates to communication and navigation systems. More
4 particularly, it relates to mobile communications systems with satellite and terrestrial
5 navigation features.

6 Description of the Related Art

7 Satellite-based navigation systems, such as the Global Positioning System (GPS),
8 allow for accurate navigation almost anywhere in the world. A constellation of GPS
9 satellites surrounds the earth in three different planes with the satellites orbiting the earth
10 every 12 hours. The orbit of each satellite is closely monitored and its position is
11 precisely known. Each GPS satellite transmits navigation signals, each signal being
12 modulated with at least one pseudo-random noise (PN) code, or a portion of a PN code,
13 unique to the satellite. Each GPS satellite uses a very stable frequency reference for
14 generating the satellite's signals. Also modulated onto the navigation signals is a satellite
15 data message (SDM) with a bit rate of 50 bits/second, which is much slower than the
16 chipping rate of the PN code. The signal structure of the GPS satellites is described in
17 further detail in Spilker, Jr., J.J. "GPS Signal Structure and Performance
18 Characteristics," Global Positioning System, Papers Published in Navigation, The

1 Institute of Navigation, Washington, D.C., 1980, which is incorporated by reference
2 herein for all purposes.

3 Using a GPS receiver with an unobstructed view of the sky a person can
4 determine his or her position within a few meters. In order to determine its position in
5 three dimensions, and to determine time precisely, the receiver must receive navigation
6 signals from at least four satellites, as shown in Fig. 1. Here, a mobile unit (MU) can
7 determine its position (x, y, z) and time by determining its distance from four sources, in
8 this case four GPS satellites (10-1, 10-2, 10-3 and 10-4), at known positions ((x_1, y_1, z_1) ,
9 (x_2, y_2, z_2) , (x_3, y_3, z_3) , (x_4, y_4, z_4)) A conventional GPS receiver is shown in Fig. 2. It
10 includes an antenna 20, a front end 30 for converting the received signals into digital
11 signals in a form suitable for processing, an array of delay lock loop (DLL) circuits 40
12 and a Kalman filter estimator 50 for estimating the receiver's position. Each DLL circuit
13 outputs a pseudo-range measurement (PR_1 through PR_n , respectively) to a summation
14 unit (units 51_1 through 51_n) in the Kalman filter estimator 50. Each summation unit
15 combines the latest pseudo-range measurement from the DLL with the Kalman filter's
16 estimate of the receiver's position $x(t)$ and provides the combined signal to a vector
17 estimation unit 52. The vector estimation unit 52 uses the outputs of the summation unit
18 to update the Kalman filter's estimate of the receiver's position and outputs a position
19 vector $\hat{x}(t)$.

20 A schematic diagram of each of the delay lock circuits (DLL_1 through DLL_n) is
21 shown in Fig. 3, shown here as a coherent DLL, although a non-coherent DLL also can
22 be used. Each DLL circuit includes a local PN code generator 65 that generates the same
23 PN codes broadcast by the GPS satellite the DLL circuit is tracking. The conventional

1 receiver also includes an early correlator 60E and a late correlator 60L that correlate the
2 received signal (i.e., the satellite signal $A(t)$ at $t=\tau$, plus noise $n(t)$) with an early and late
3 versions of the locally generated PN code $S_0(t)$. As shown in Fig. 3 the early version of
4 the PN code is advanced by half a PN chip period T (i.e., $+T/2$) and the late version is
5 delayed by half a PN chip period (i.e., $-T/2$). The early and late correlation signals are
6 each filtered by low pass filters 61E and 61L, respectively. The filtered signals are
7 combined using combiner 62 and the resultant signal is filtered by loop filter 63. The
8 output of loop filter 63 is a control signal that controls a number controlled oscillator
9 (NCO) 64. The NCO generates a number, based on the control signal from loop filter 63,
10 that causes the PN generator 65 to output its PN sequence either faster or slower
11 depending on which of the early and late correlators outputs a stronger signal. The DLL
12 circuit tracks the code in the received signal and a time measurement, called a pseudo-
13 range measurement, is made. The measured pseudo-range is a measure of the signal
14 propagation time between the satellite and the receiver.

15 Upon acquiring the satellite signal, the receiver demodulates the SDM from that
16 received signal. The SDM includes satellite ephemeris information concerning the orbits
17 and positions of each satellite, and satellite time model information concerning the
18 satellites' clocks. A receiver uses this information in combination with the measured
19 pseudo-ranges to determine the receiver's position by calculating a navigation solution.

20 The SDM is 900 bits long and is broadcast every 30 seconds at 50 bits/second.
21 Accordingly, a GPS receiver can receive and store the SDM if it is able to receive a
22 satellite's signal continuously for the amount of time the SDM is broadcast, and during
23 the period that the satellite broadcasts the SDM. Also modulated onto the navigation

1 signal at 50 bits/second is the GPS almanac: a 15,000 bit block of coarse ephemeris and
2 time mode data for the entire GPS constellation. The receiver needs this course data to
3 assist in its acquiring a GPS satellite signal. Receiving the GPS almanac can take at least
4 12 ½ minutes of listening to a single GPS satellite to receive the almanac data.

5 Other methods of delivering the SDM and GPS almanac data are known. For
6 example, U.S. Patent No. 5,365,450, incorporated by reference herein for all purposes,
7 describes delivering the SDM via a cellular telephone system to shorten the time required
8 to acquire a GPS satellite. There, a person wanting to rapidly acquire a GPS navigation
9 signal uses a cellular telephone network to request the SDM. The cellular network stores
10 the current ephemeris and time models of the GPS satellite constellation in a GPS
11 satellite almanac database. Upon receiving the request the cellular telephone system
12 responds to the request by sending the requested data over an independent data link. The
13 receiver then uses that data to acquire a GPS satellite signal. However, this system relies
14 on the receiver having an unobscured view of the GPS satellites to continuously track the
15 satellites. Such an unobscured view is not always available to a user, particularly a
16 mobile user.

17 Certain environments can obstruct the view of the sky. A prime example is the
18 so-called "urban canyon" where tall buildings densely concentrated in an urban setting
19 obscure significant portions of the sky and block the GPS satellite signals preventing
20 their reception. One way to track GPS satellites in an obscured environment is to use a
21 vector delay lock loop described in U.S. Patent No. 5,398,034, incorporated by reference
22 herein for all purposes. A vector DLL improves over a conventional delay lock loop by
23 using the receiver's estimated position vector (x, y, z and time) to control the local PN

1 code generator, rather than using the correlator output as in a conventional DLL circuit.
2 The vector DLL can use measurements from a variety of sources in computing the
3 receiver's position vector. These sources could include signals from all GPS satellites
4 visible to the receiver, signals from other visible navigation satellites such as satellites in
5 the former Soviet Union's GLONASS system, and even signals from ground-based
6 navigation transmitters such as so-called "pseudolites" that transmit a GPS-like
7 navigation signal from a known, fixed location. A conventional vector DLL is shown in
8 Fig. 4, and is similar to the receiver shown in Fig. 2, but also contains a $H(x)$
9 transformation unit 70 that transforms the estimated position information into control
10 signals for controlling the DLLs.

11 Other techniques for providing navigation signals in environments with
12 obstructed visibility of the sky include embedding navigation beacons in communication
13 signals within a cellular telephone system base station, as described in U.S. Patent No.
14 5,604,765, incorporated by reference herein for all purposes. There, the navigation
15 signals are transmitted from a base station either in a standalone or overlay mode where
16 the signal level of the navigation signals is kept below the tolerable noise level of the
17 communications signals. Included in the navigation signal is information identifying the
18 base station and the base station's location (e.g., base station latitude and longitude).
19 U.S. Patent No. 6,111,538, incorporated by reference herein for all purposes, describes
20 how a set of spread spectrum navigation beacons, such as those described above, can be
21 designed and arranged in a cellular pattern, and how the required navigation receiver
22 signal processing can be efficiently integrated into a cellular telephone.

1 A mobile unit equipped with a GPS receiver having a vector DLL must receive
2 updates to the satellite data messages transmitted by the satellites that the receiver is
3 tracking in order to generate accurate position estimates. When the mobile unit is
4 traveling where visibility to the open sky is intermittent at best, it may be able to receive
5 a satellite signal only for brief periods. The vector DLL circuit allows the receiver to
6 continue to track a satellite even during brief interruptions to the signal due to the signal
7 being obscured. However, if the signal is received intermittently for only brief periods,
8 the receiver may not be able to retrieve the SDM during those brief periods when it
9 receives the GPS signal. Accordingly, the receiver may not be able to acquire the
10 information it needs from the satellite data message, or it may have a satellite message
11 that is stale and in need of being refreshed. The receiver also may not have enough
12 storage to hold the satellite data messages for all satellites being tracked. Accordingly,
13 there is a need to provide a GPS receiver with current satellite data messages and GPS
14 almanac data for use with a vector delay lock loop, regardless of the amount of time a
15 GPS signal is available to the receiver. Such capabilities are needed for the vector delay
16 lock loop to operate more accurately and with fresher data than when operating with
17 conventional systems.

18 SUMMARY OF THE INVENTION

Therefore, in light of the above, and for other reasons that will become apparent when the invention is fully described, an object of the invention is to enable a receiver to obtain information concerning the location of a source of a navigation signal even when the receiver is not receiving the navigation signal, and track that source even when the navigation signal is only intermittently received.

1 Another object of the invention is to use the information concerning the location
2 of the navigation beacon with a vector delay lock loop circuit to enable the receiver to
3 continue to accurately track the navigation beacon when the navigation beacon is
4 received intermittently. In a system in which a mobile terminal may receive multiple
5 navigation signals from different sources, including GPS and signals transmitted from
6 cellular base stations, it is important to have an algorithm that is robust in that it
7 computes a best estimate of position based upon the available signals. In addition, since
8 in many terrestrial environments the signals are intermittent due to blockage, it is
9 important to have an algorithm in which all navigation signals are cooperatively tracked.
10 As a result, the estimate of the mobile terminal's position is more robust, as long as the
11 minimum number (e.g., four) of navigation signals is received at least intermittently,
12 because blockage of the navigation signal does not prevent the circuit from obtaining the
13 position information of the satellite and terrestrial navigation sources.

14 Yet another object of the invention is to transmit data concerning the position of a
15 source of a navigation signal, such as a GPS satellite, using a common broadcast control
16 channel of a cellular telephone network. The data is for use by a vector delay lock loop
17 circuit in tracking the navigation signal when it is only intermittently received. The data
18 is also used to allow for rapid reacquisition of a formerly blocked navigation signal by
19 enabling the vector delay lock loop circuit to maintain a running estimate of the signal
20 delay even for blocked signals.

21 Still another object of the invention is to enable a mobile terminal to use a vector
22 delay lock loop circuit to determine its position from a set of signals that may be
23 transmitted by earth orbiting satellites, such as GPS satellites, or by terrestrial based

1 cellular base stations, or a combination of satellite and terrestrial based stations, in which
2 information concerning the position of the satellites or terrestrial stations is obtained from
3 a cellular common broadcast channel.

4 Still another object of the invention is to use the communication signals in a
5 cellular telephone network as a navigation signal. According to one aspect of the
6 invention this can be accomplished by receiving a GPS signal at a cellular base station,
7 and using the GPS signal to provide frequency and time references for controlling the
8 characteristics of the cellular communications signals.

9 BRIEF DESCRIPTION OF THE DRAWINGS

10 Fig. 1 is a diagram depicting a spatial relationship between a mobile unit and four
11 sources of navigation signals.

12 Fig. 2 is a schematic diagram of a conventional GPS receiver.

13 Fig. 3 is a schematic diagram of a conventional coherent delay lock loop circuit.

14 Fig. 4 is schematic diagram of a conventional GPS receiver using a vector delay
15 lock loop circuit.

16 Fig. 5 is a schematic diagram of a GPS receiver using a vector delay lock loop
17 circuit with an input SDM message received from a cellular communications system.

18 Fig. 6 is a schematic diagram of a vector delay lock loop circuit used in the
19 receiver of Fig. 5.

Fig. 7 is a schematic diagram of a hybrid position determination system having a base station navigation unit for receiving GPS signals and broadcasting satellite data messages over a broadcast control channel to mobile terminals.

Fig. 8 is a schematic diagram of a hybrid position determination system using cellular communications signals as navigation signals.

6 DETAILED DESCRIPTION

Preferred embodiments according to the present invention are described below
with reference to the above drawings, in which like reference numerals designate like
components.

10 *Broadcast of SDM Data for Use with Vector Delay Lock Loop*

A hybrid position determination system is shown schematically in Fig. 5. The system shown in Fig. 5 is similar to the vector delay lock loop system shown in Fig. 4, except it includes a modified $H(x)$ transformation unit 80. The modified transformation unit 80 receives satellite data messages and GPS almanac information from the received GPS signal, as in the conventional vector delay lock loop system, and it also receives the SDM and GPS almanac data separately from a cellular receiver 90. The SDM and GPS almanac data received on a broadcast control channel by way of the cellular receiver 90 are input to the $H(x)$ transformation unit 80, and are used by the vector delay lock loop whenever the SDM and GPS almanac data are not available from the satellite signal, or even if they are available from the satellite signal.

1 By providing the SDM and GPS almanac data to H(x) transformation unit 80
2 through the cellular communication system, that data is available for the receiver's use
3 more often than in the conventional vector delay lock loop system.

4 The satellite data message (SDM) for each GPS satellite is 900 bits long and is
5 transmitted from the satellite every 30 seconds at a rate of 50 bits/second. The GPS
6 almanac data is 15,000 bits long and it too is transmitted at 50 bits/second. If the
7 receiver cannot receive the satellite's signal during the time it transmits its SDM, the
8 receiver must wait another 30 seconds for the satellite to again transmit the SDM. In
9 situations where GPS signals can be received only intermittently, the receiver may not be
10 able to receive the SDM for a satellite it is tracking. Although the vector delay lock loop
11 allows a receiver to continue tracking when the satellite's navigation signal is only
12 intermittently received, if the SDM cannot be received the quality of the vector delay
13 lock loop tracking will be diminished. Accordingly, the receiver of Fig. 5 by receiving
14 the SDM by way of the cellular network, allows the vector delay lock to accurately track
15 a GPS satellite signal that is only intermittently received.

16 A more detailed schematic representation of a mobile terminal employing a vector
17 delay lock loop circuit is shown in Fig. 6. The vector delay lock loop circuit here does
18 not require a demodulator for extracting satellite navigation data from the navigation
19 signals received from the GPS satellites. Rather, the mobile terminal obtains the required
20 navigation data from the cellular broadcast channel. As shown in Fig. 6 the mobile
21 terminal can receive signals from GPS satellites, such as signals S1 from a first satellite,
22 S2 from a second satellite, as so forth. The received signals are directed to a correlator
23 (e.g., 100S1) of a delay lock loop circuit. The delay lock loop circuit also includes a

1 pseudonoise (PN) code generator 110_{S1}, driven by a clock signal CLK. The clock signal
2 can be the output of an NCO circuit that is controlled by a pseudo-range estimate (e.g.,
3 r_{S1}) for the satellite being tracked. The DLL circuit also includes a detector 130_{S1} that
4 receives the output of the correlator. A low pass filter (LPF) 140_{S1} filters the output of
5 the detector and outputs a pseudo-range measurement for the satellite that the delay lock
6 loop is tracking.

7 The vector delay lock loop of Fig. 6 also processes other navigation signals other
8 than GPS satellite signals, such as navigation signals transmitted from a terrestrial based
9 source. For example, the mobile terminal can receive navigation signals embedded in
10 communication signals transmitted from a cellular network's base station, as shown in
11 Fig. 6. Here, a delay lock loop includes a correlator 100_{T1}, a pseudonoise generator 110_{T1}
12 driven by a clock controlled by an NCO that is controlled by the pseudo-range estimate
13 r_{T1} for the terrestrial based navigation station, a detector 130_{T1} and a LPF 140_{T1}. This
14 delay lock loop produces a pseudo-range measurement for the terrestrial based navigation
15 station; in this case a cellular base station.

16 The pseudo-range measurements are input to a linear weight matrix 150 that
17 determines the weight to give to each pseudo-range measurements based upon the
18 navigation data for the source of the navigation signal. The linear weight matrix uses a
19 satellite's data message delivered over the common broadcast channel of the cellular
20 communication network in assigning a weight to the pseudo-range measurement for that
21 satellite. Similarly, the linear weight matrix uses the navigation data for the base station
22 that transmits the navigation signal being processed in weighting the pseudo-range
23 measurements for that base station.

1 A geometry and signal level processor 160 receives from the cellular broadcast
2 control channel the satellite position information from the SDMs broadcast for each
3 satellite, and the base station position information for base stations in the vicinity that are
4 transmitting navigation beacons. The geometry and signal level processor 60 uses the
5 satellite and base station position information in assigning weights to the pseudo-range
6 measurements.

7 The weighted position measurements (x, y, z) and a weighted measure of time
8 bias (b) represent the estimate of the mobile terminal's position and time bias, and are
9 output from the linear weight matrix, filtered by filters 170x through 170b, and applied to
10 a direction cosine matrix 180. The direction cosine matrix 180 uses these weighted
11 measurements and the satellite and terrestrial position and clock information provided via
12 the broadcast control channel to calculate the pseudo-range estimates of the satellite and
13 terrestrial transmitters, r_{S1} and r_{T1} , respectively. The pseudo-range estimates are used to
14 control the vector delay lock loops' pseudonoise generators as described above.

15 The position and clock bias estimates are also input to a summation unit 190 that
16 sums the estimates with prior estimates using a delay circuit 195, to output an estimate of
17 the mobile terminal's position, as shown in Fig. 6.

18 A hybrid position determination system for delivering the SDM via a cellular
19 communication system is shown in Fig. 7. A cellular network base station 200 includes a
20 GPS receiver 210 connected to a GPS antenna 220 for receiving signals from GPS
21 satellites. The base station is likely located with an unobscured view of the sky and
22 therefore can receive the GPS satellite signals. The GPS receiver 210 receives the GPS
23 satellite signals and extracts the SDM from each of those signals. It sends the SDMs to a

1 common channel message formatter 230 to format the SDM data for delivery over a
2 broadcast control channel of the cellular communications network. The formatted SDMs
3 are sent to a signal modulator 240 for modulation onto a cellular signal. The modulated
4 signal is multiplexed by channel multiplexer 250 with signals from other channels for
5 transmission over an antenna 260 on a channel of the cellular communication system.
6 Preferably, the SDMs are broadcast over a broadcast control channel to allow any mobile
7 terminal in the base station's vicinity to receive the SDM data.

8 A mobile terminal 270 includes a cellular communication system antenna 280 that
9 receives the cellular signals and routes them to a network receiver 290. The network
10 receiver 290 monitors the broadcast control channel and extracts the SDM from that
11 channel. The network receiver 290 sends the extracted SDMs to the vector delay lock
12 loop in a GPS receiver 300. The GPS receiver 300 is connected to a GPS antenna 310 to
13 receive signals from the GPS satellites, such as satellites 320a and 320b. In the event the
14 signals from the satellites 320a and 320b are intermittently blocked, due to their being
15 obscured, the GPS receiver 300 uses the SDM broadcast by base station 200.
16 Alternatively, the GPS receiver 300 always uses the SDM broadcast by base station 200.

17 Each base station in the cellular communication system can have a GPS receiver
18 that extracts the SDM and GPS almanac data from satellites visible to the base station for
19 broadcast to mobile terminals in range of the base station. Alternatively, the SDMs and
20 GPS almanac data may be extracted at a single regional site, and then relayed to the base
21 stations in the region to be incorporated into their common broadcast channel.

22 A separate broadcast channel can continuously broadcast the SDM and GPS
23 almanac data. Alternatively, that data can be broadcast periodically on a common

1 broadcast channel. In a GSM cellular communication system, which is one type of
2 system in which the hybrid position determination system can be used, the common
3 broadcast channel is the BCCH channel. The BCCH channel can be used to broadcast
4 the SDM and GPS almanac data. Because a GSM telephone normally receives and
5 decodes the BCCH in its 'on' state, the GSM telephone would therefore acquire the
6 SDMs of its in view GPS satellites as a byproduct of its connectivity to the GSM
7 network. Thus, a mobile terminal that incorporates a GSM telephone, a well-known
8 device for two-way communication using a wireless GSM cellular network, and a GPS
9 receiver has the ability to rapidly acquire all in view satellites. It also has the ability to
10 use the GPS data for the vector delay lock loop to accurately and robustly track GPS
11 satellites even if they are obscured from view and the satellite signal is available only
12 intermittently.

13 Other types of cellular communication networks can be used to transmit the
14 SDMs and GPS almanac data. For example, third generation (3G) cellular systems such
15 as cdma2000, WCDMA and UWC-136 also have common broadcast channels that can be
16 used to broadcast SDMs to all telephones in their networks, as described above for GSM
17 systems.

18 *Use of Vector Delay Lock Loop with Embedded Navigation Beacons*

19 It is possible to embed navigation beacons within the same spectrum of the
20 communication system that may be received by the mobile terminals, and yet do not
21 interfere with network communications. In this aspect of the invention the base station
22 not only transmits the SDM data in its common broadcast channel, but it also synthesizes

1 a navigation beacon signal that is embedded in the communications signal. Such
2 embedding may be a distinct signal, such as a low power spread spectrum signal
3 occupying the spectrum used by multiple GSM channels, or it may be a specifically
4 designated network communications channel separate from the other communications
5 channels. In either case the channel includes a frequency and timing reference, such as a
6 CDMA channel with improved frequency and timing so that it can support precise
7 positioning by mobile terminals. According to this aspect of the invention the mobile
8 terminal may determine its position from only GPS signals, only network navigation
9 beacons, or from a combination of each.

10 Fig. 8 illustrates a hybrid position determination that includes all the elements of
11 the system shown in Fig. 7, but provides for additional navigation beacons that are
12 transmitted by the base stations 200 of a cellular network. In the system shown in Fig. 7,
13 the GPS receiver 210 is connected to a GPS antenna 220 for receiving the GPS satellite
14 signals. Here the GPS receiver 210 provides time and frequency references to an
15 embedded navigation signal unit 255. The time and frequency references are generated
16 based on the GPS signals received from the GPS satellites, and allow the embedded
17 navigation signal unit 255 to control the frequency and timing of the signals broadcast by
18 the base station to correspond to the frequency and timing in the GPS system.

19 The embedded navigation beacon may be a signal separate from the
20 communications signals, such as a spread spectrum signal over multiple 200 kHz GSM
21 channels. Alternatively, the embedded navigation signal may be a communications
22 signal broadcast with improved frequency and timing precision so that it may serve as a

1 navigation beacon. In either case, the embedded navigation signal is included in the
2 signals multiplexed by broadcast channel multiplex unit 250.

3 The network receiver 290 in the mobile terminal 270 receives the embedded
4 navigation signals and makes measurements on them (i.e., pseudo-range measurements)
5 that can be used by a position processor 330 to determine the mobile terminal's position.
6 Such position determination can rely solely upon the measurements of the embedded
7 signals, or may combine the measurements of the network receiver 290 and the GPS
8 receiver 300.

9 *Applications*

10 The mobile terminal position systems and methods according to the aspects of the
11 invention described here are useful for a variety of applications, including the following.

- 12 • Position Dependent Billing: With a mobile terminal that is able to determine
13 its position, the terminal can alert the user which zone it is in and the resulting
14 cost of making a call from that zone.
- 15 • E911 Service: When the mobile terminal makes a 911 call, it relays its pre-
16 determined position within the message overhead of the call. The position is
17 then captured by the cellular service provider and relayed to the Public
18 Service Access Provider (PSAP) that services the E911 service. In this way,
19 the PSAP is immediately informed of the position of the emergency.
- 20 • Position Dependent Yellow Pages: When a mobile terminal makes a call to a
21 Yellow Pages' service provider, the cellular service provider captures the
22 terminal position and relays it to the Yellow Pages service provider. The

1 Yellow Pages service provider can then provide position dependent service
2 information (e.g., the location of the nearest ATM, open gas station, etc.).

- 3 • Smart Antennas: A cellular service provider, with knowledge of a mobile
4 terminal's position, can control a "smart" antenna to form a beam in the
5 direction of the mobile terminal being served. The mobile terminal once it
6 determines its position using the techniques described here can send to the
7 cellular service provider position information estimating its position. The
8 provider would then use that position information to form a beam to better
9 communicate with the mobile terminal.

10 Having described preferred embodiments of a hybrid position determination
11 system, it is believed that other modifications, variations and changes will be suggested
12 to those skilled in the art in view of the teachings set forth herein. It is therefore to be
13 understood that all such variations, modifications and changes are believed to fall within
14 the scope of the present invention as defined by the appended claims. Although specific
15 terms are employed herein, they are used in their ordinary and accustomed manner only,
16 unless expressly defined differently herein, and not for purposes of limitation.

What is claimed is:

- 1 1. A method of determining a range between a first navigation source
2 transmitting a first navigation signal and a mobile unit configured for use in a
3 communication network, the method comprising:
4 receiving a second navigation signal transmitted from a second navigation source;
5 receiving from the communication network a data message having information
6 concerning the first navigation source, the data message being transmitted through the
7 communication network; and
8 determining a range between the first navigation source and the mobile unit based
9 on the second navigation signal received from the second navigation source and the
10 information in the data message received from the communications network.
- 1 2. The method of claim 1, further comprising intermittently receiving the
2 first navigation signal and determining the range based on the intermittently received first
3 navigation signal.
- 1 3. The method of claim 2, wherein the range is determined by inputting the
2 information from the received data message and the first and second received navigation
3 signals into a vector delay lock loop (VDLL) unit, and in response thereto the VDLL unit
4 outputting a measurement of the range between the first navigation source and the mobile
5 unit.
- 1 4. The method of claim 1, wherein the data message is received from a
2 broadcast channel of a two-way wireless communication network.

1 5. The method of claim 1, wherein the communication network is a cellular
2 communication network.

1 6. The method of claim 5, wherein the cellular communications network is a
2 GSM cellular communication network and the broadcast channel is the BCCH channel of
3 the GSM network.

1 7. The method of claim 5, wherein the broadcast channel is a common
2 broadcast control channel of one of a cdma2000 cellular communication network, a
3 WCDMA cellular communication network, and a UWC-136 cellular communication
4 network.

1 8. The method of claim 1, wherein the second navigation source is a ground-
2 based navigation source.

1 9. The method of claim 8, wherein the ground-based navigation source is a
2 base station in a wireless communication system.

1 10. The method of claim 9, wherein the base station transmits the second
2 navigation signal using a frequency reference controlled based on a frequency reference
3 used by the first navigation source.

1 11. The method of claim 10, wherein the first navigation source is a spaced-
2 based satellite.

1 12. The method of claim 1, further comprising determining a position of the
2 mobile unit based on the determined range.

3 13. The method of claim 12, further comprising altering a user of the mobile
4 unit with information concerning a cost of making a telephone call based on the
5 determined position.

1 14. The method of claim 12, further comprising including in a message sent
2 from the mobile unit the determined position of the mobile unit.

1 15. The method of claim 13, further comprising receiving position dependent
2 service information in response to the sent message.

1 16. A mobile unit for use in a communication network having a
2 communication channel, comprising:
3 a network receiver configured to receive over the channel a communications
4 signal including a first navigation data message having information concerning a first
5 navigation source; and
6 a navigation receiver comprising a vector delay lock loop (VDLL) unit configured
7 to receive the first navigation data message from the network receiver and a first
8 navigation signal from the first navigation source and a second navigation signal from the
9 second navigation source, and configured to compute a range between the mobile unit
10 and the first navigation source based on the second navigation signal and the first
11 navigation data message.

1 17. The mobile unit of claim 16, wherein the channel is a broadcast channel of
2 a two-way wireless communication network.

1 18. The mobile unit of claim 17, wherein the first navigation source is a base
2 station in the wireless communication network.

1 19. The mobile unit of claim 17, wherein the wireless communication network
2 is a cellular communication network.

1 20. The mobile unit of claim 19, wherein the channel is a broadcast control
2 channel (BCCH) of a GSM cellular communication network.

1 21. The mobile unit of claim 19, wherein the channel is a common broadcast
2 control channel of one of a cdma2000 cellular communication network, a WCDMA
3 cellular communication network, and a UWC-136 cellular communication network.

1 22. The mobile unit of claim 16, wherein the first navigation source is a
2 Global Positioning System (GPS) satellite.

1 23. The mobile unit of claim 16, wherein first navigation signal is a navigation
2 beacon embedded within a communication signal in the wireless communication
3 network.

1 24. The mobile unit of claim 23, wherein the navigation beacon is a low
2 power spread spectrum signal occupying the spectrum used by the communication signal.

1 25. The mobile unit of claim 23, wherein the channel uses frequency and
2 timing references derived from a navigation system using the second navigation source.

1 26. The mobile unit of claim 16, wherein the VDLL unit computes the range
2 between the mobile unit and the first navigation source when the mobile unit cannot
3 receive the first navigation signal.

1 27. The mobile unit of claim 16, wherein the VDLL unit comprises:
2 a correlator configured to receive the first and second navigation signals and
3 output range measurements for the first and second navigation sources;
4 a geometry processor configured to receive the first navigation data message and
5 output information concerning the position of the first navigation source;
6 a weighting unit coupled to the correlator and the geometry processor, and
7 configured to assign weights to the range measurements based on the information output
8 from the geometry processor, and output weighted range measurements; and
9 a range calculation unit coupled to the weighting unit and the geometry processor
10 configured to combine the weighted range measurements based on the information output
11 from the geometry processor, and output a range measurement.

1 28. A mobile unit for use in a communication network having a channel,
2 comprising:
3 means for receiving a first navigation signal from a first navigation source and a
4 second navigation signal from a second navigation source;
5 means for receiving over the channel a communications signal including a first
6 navigation data message having information concerning the first navigation source; and
7 means for computing a range between the mobile unit and the first navigation
8 source based on the second navigation signal and the first navigation data message.

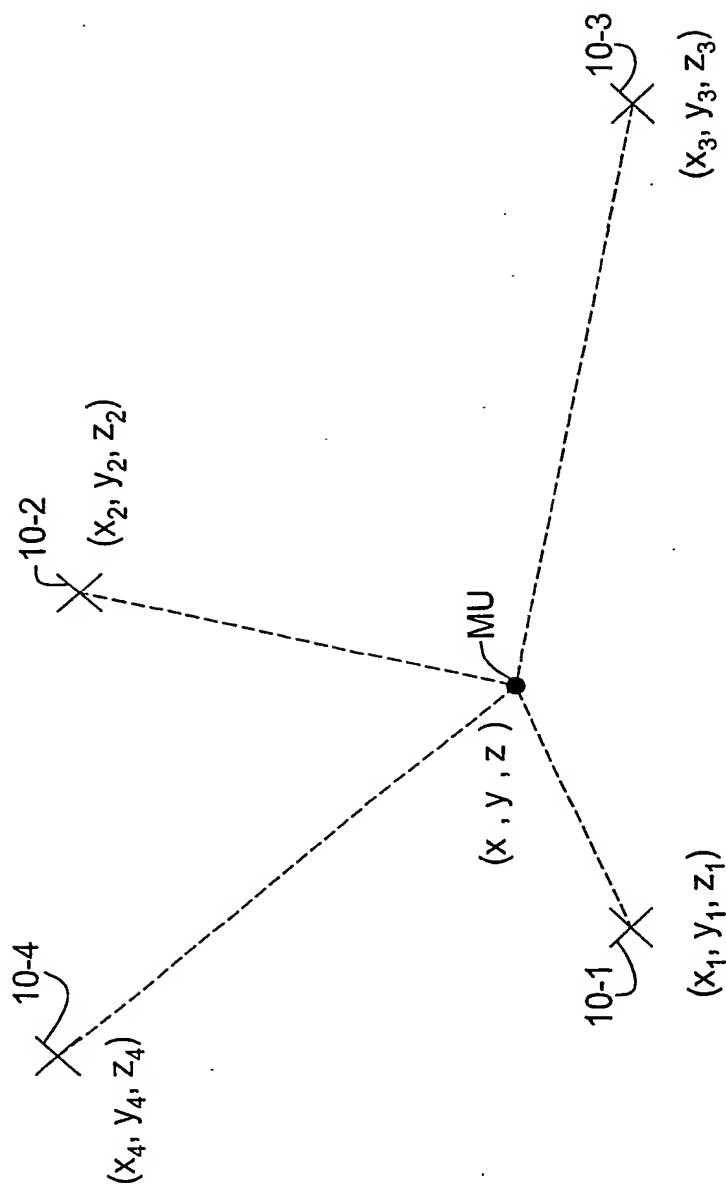


FIG.1

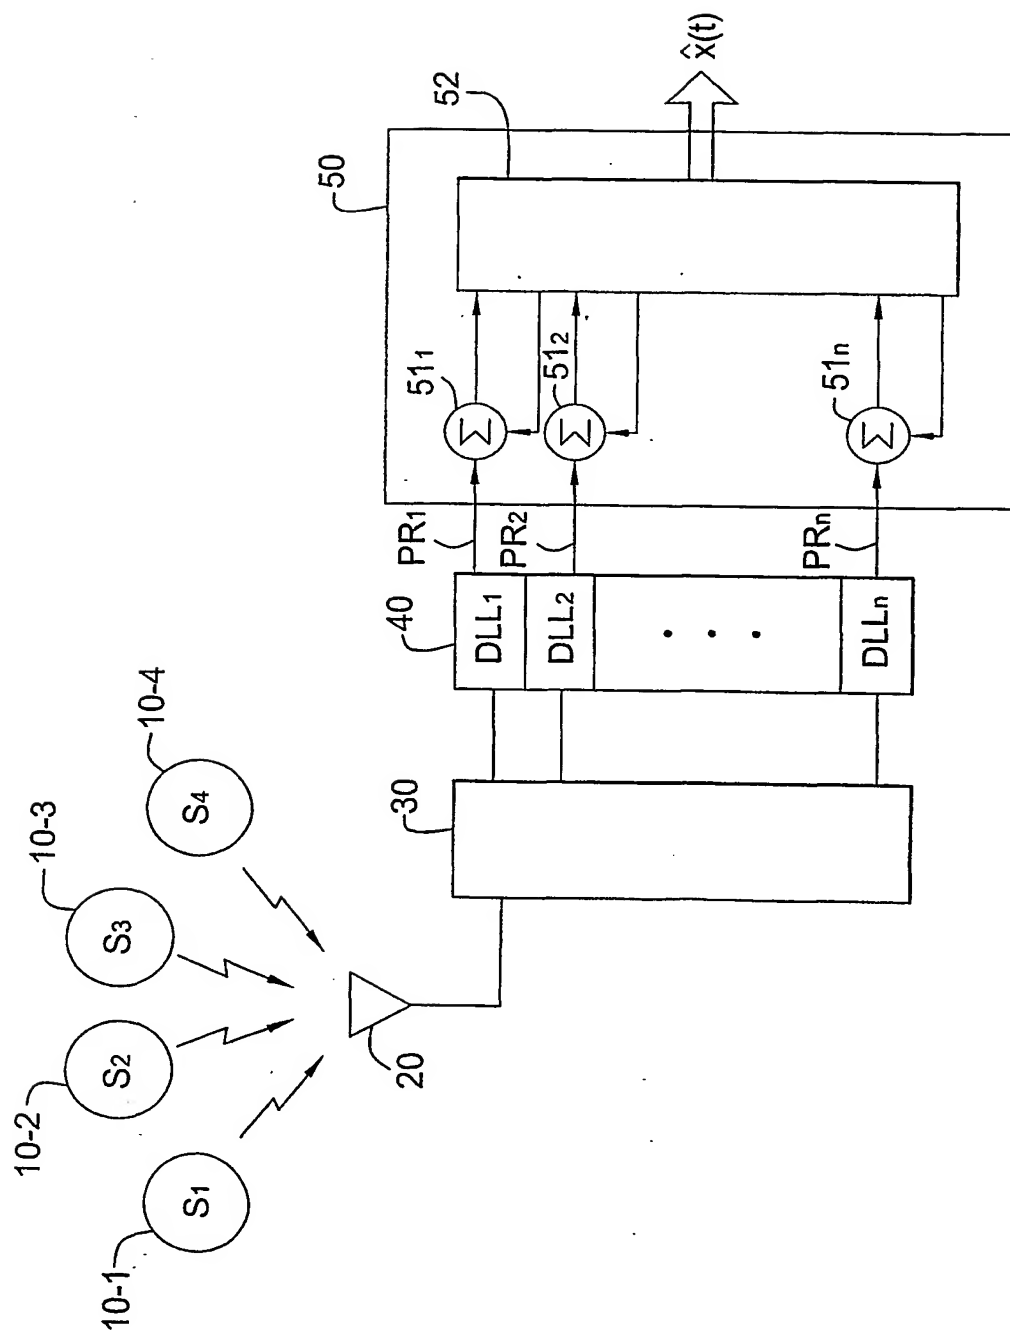
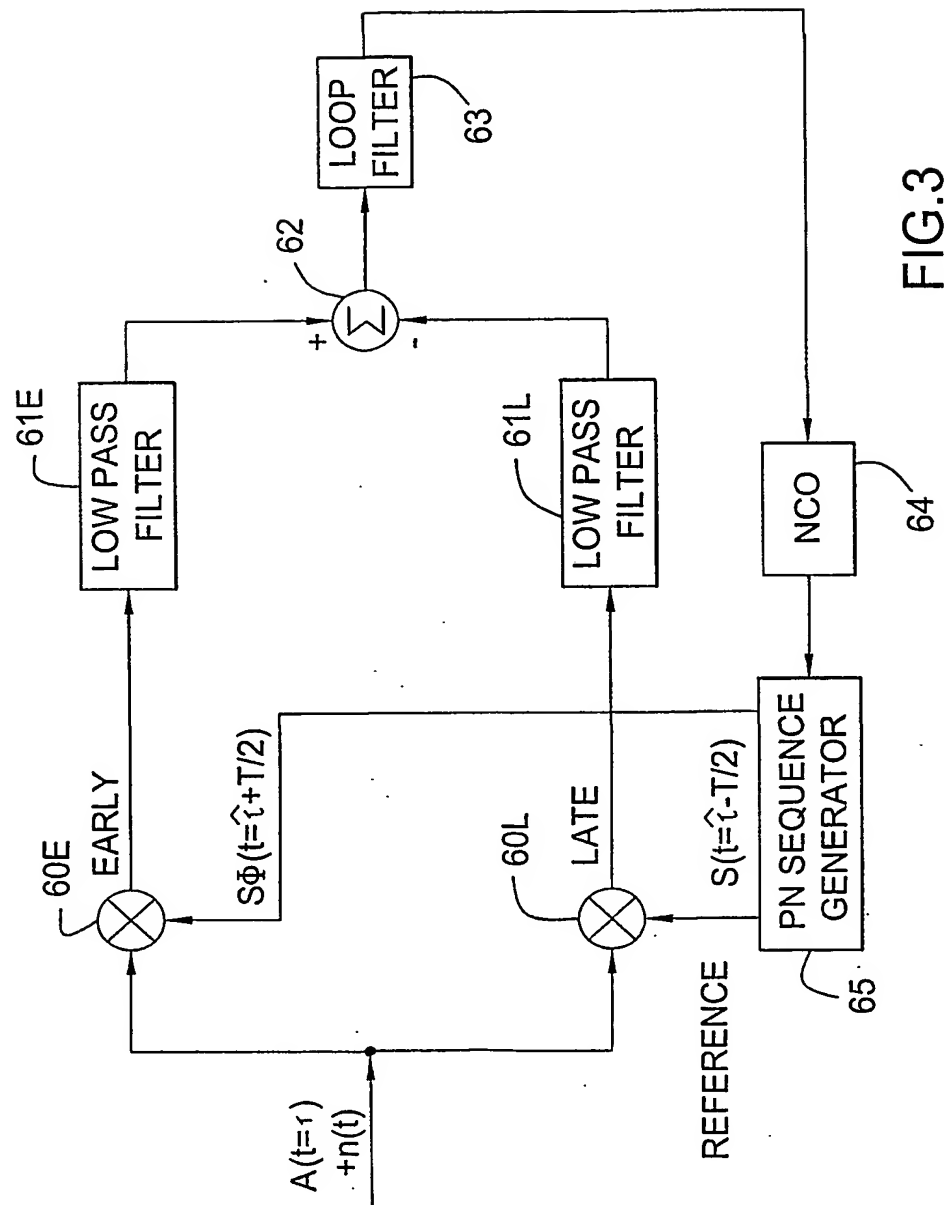


FIG. 2



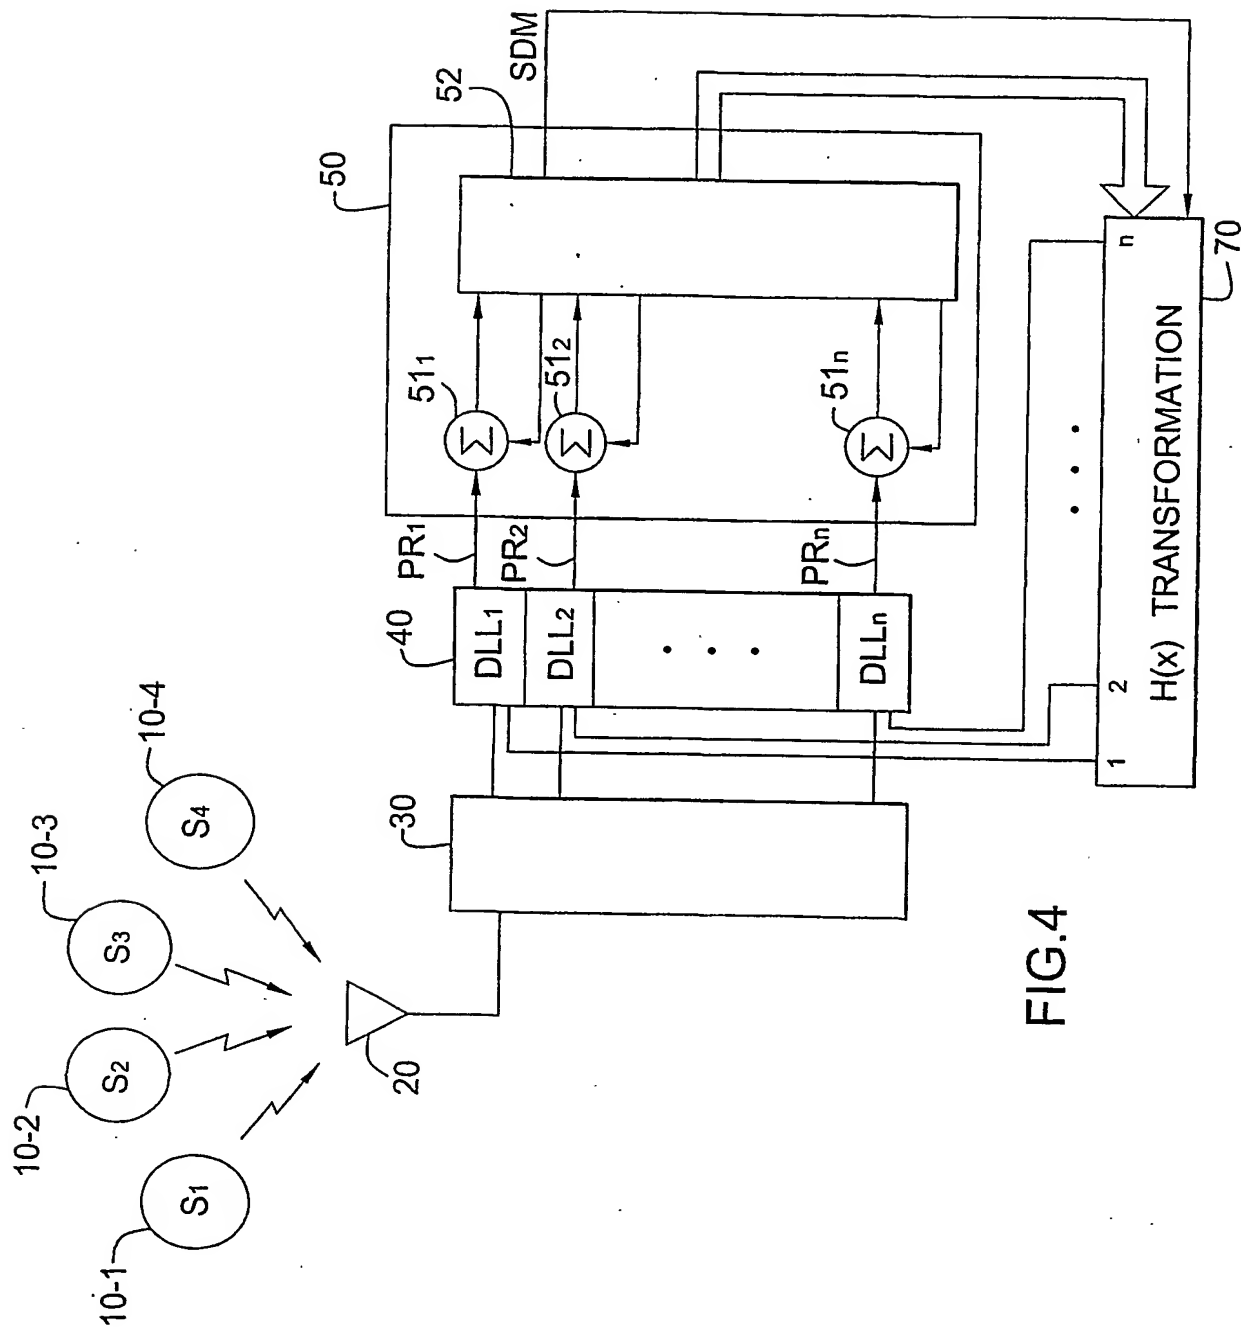


FIG.4

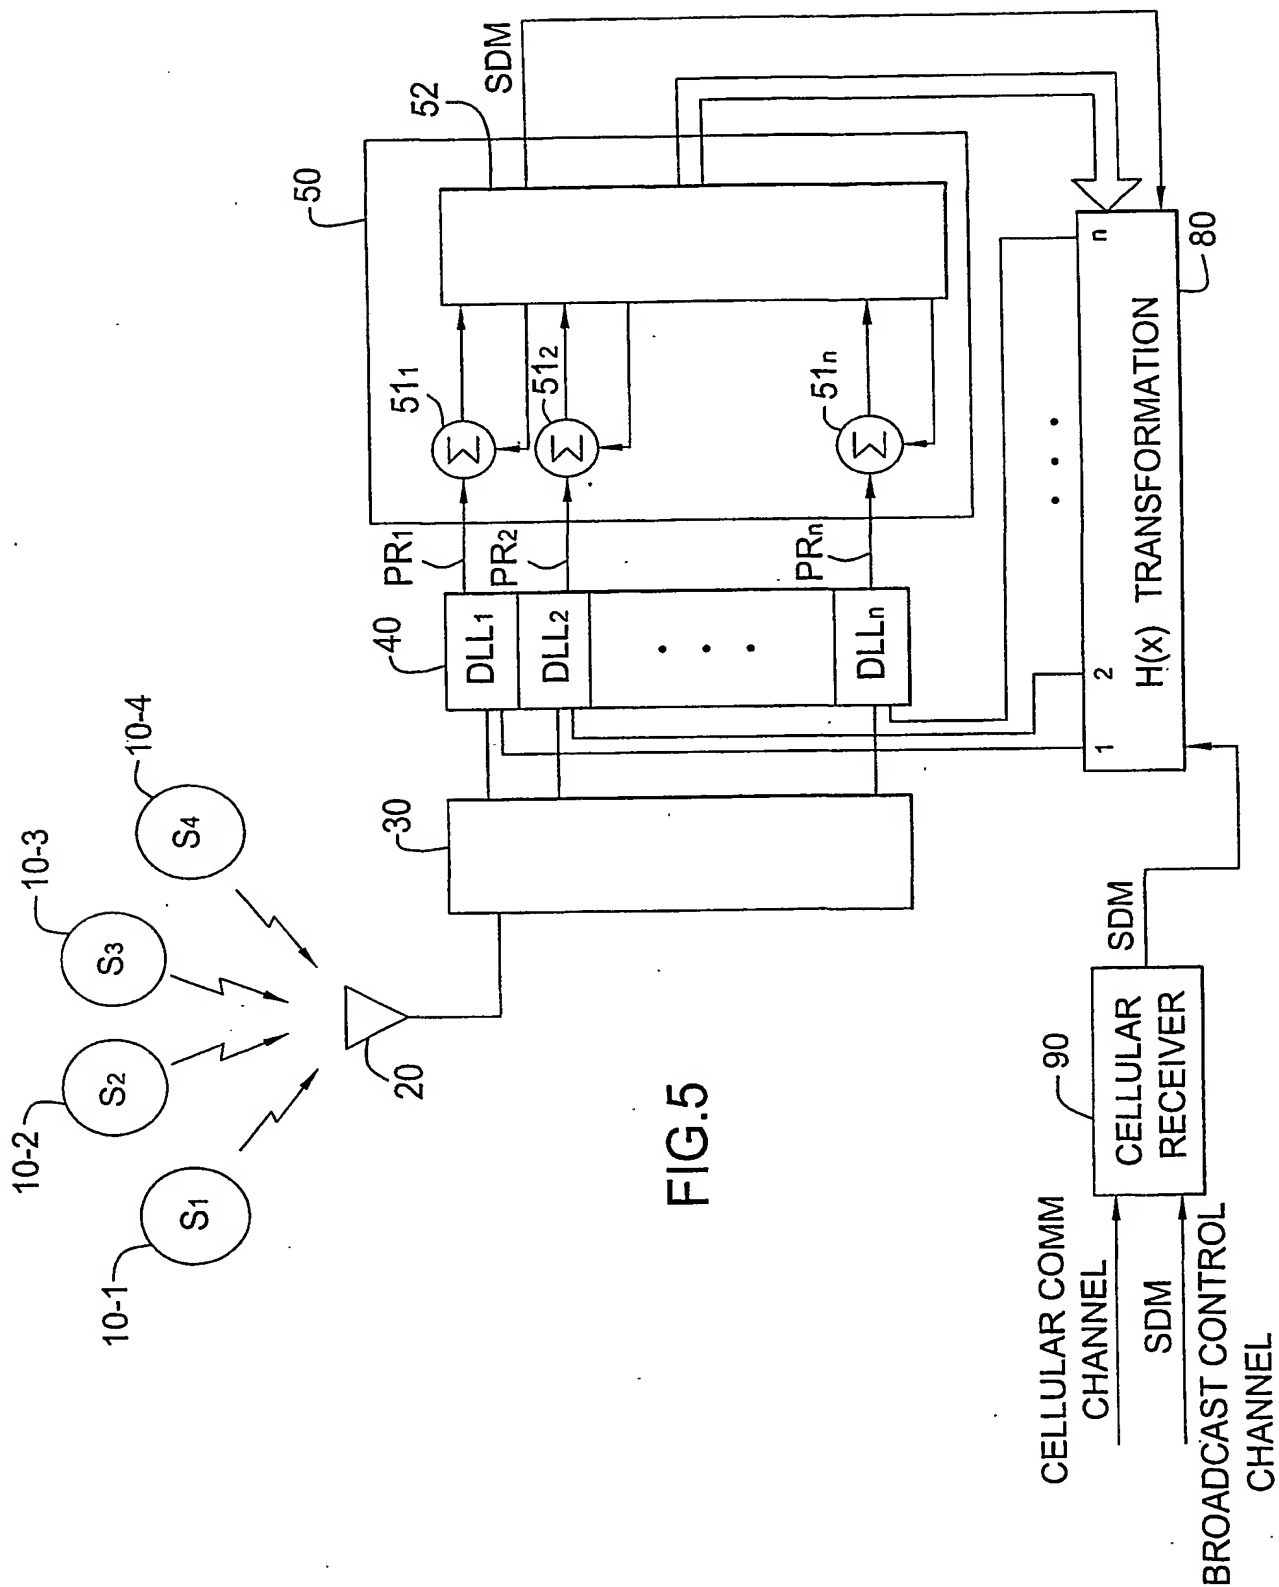


FIG. 5

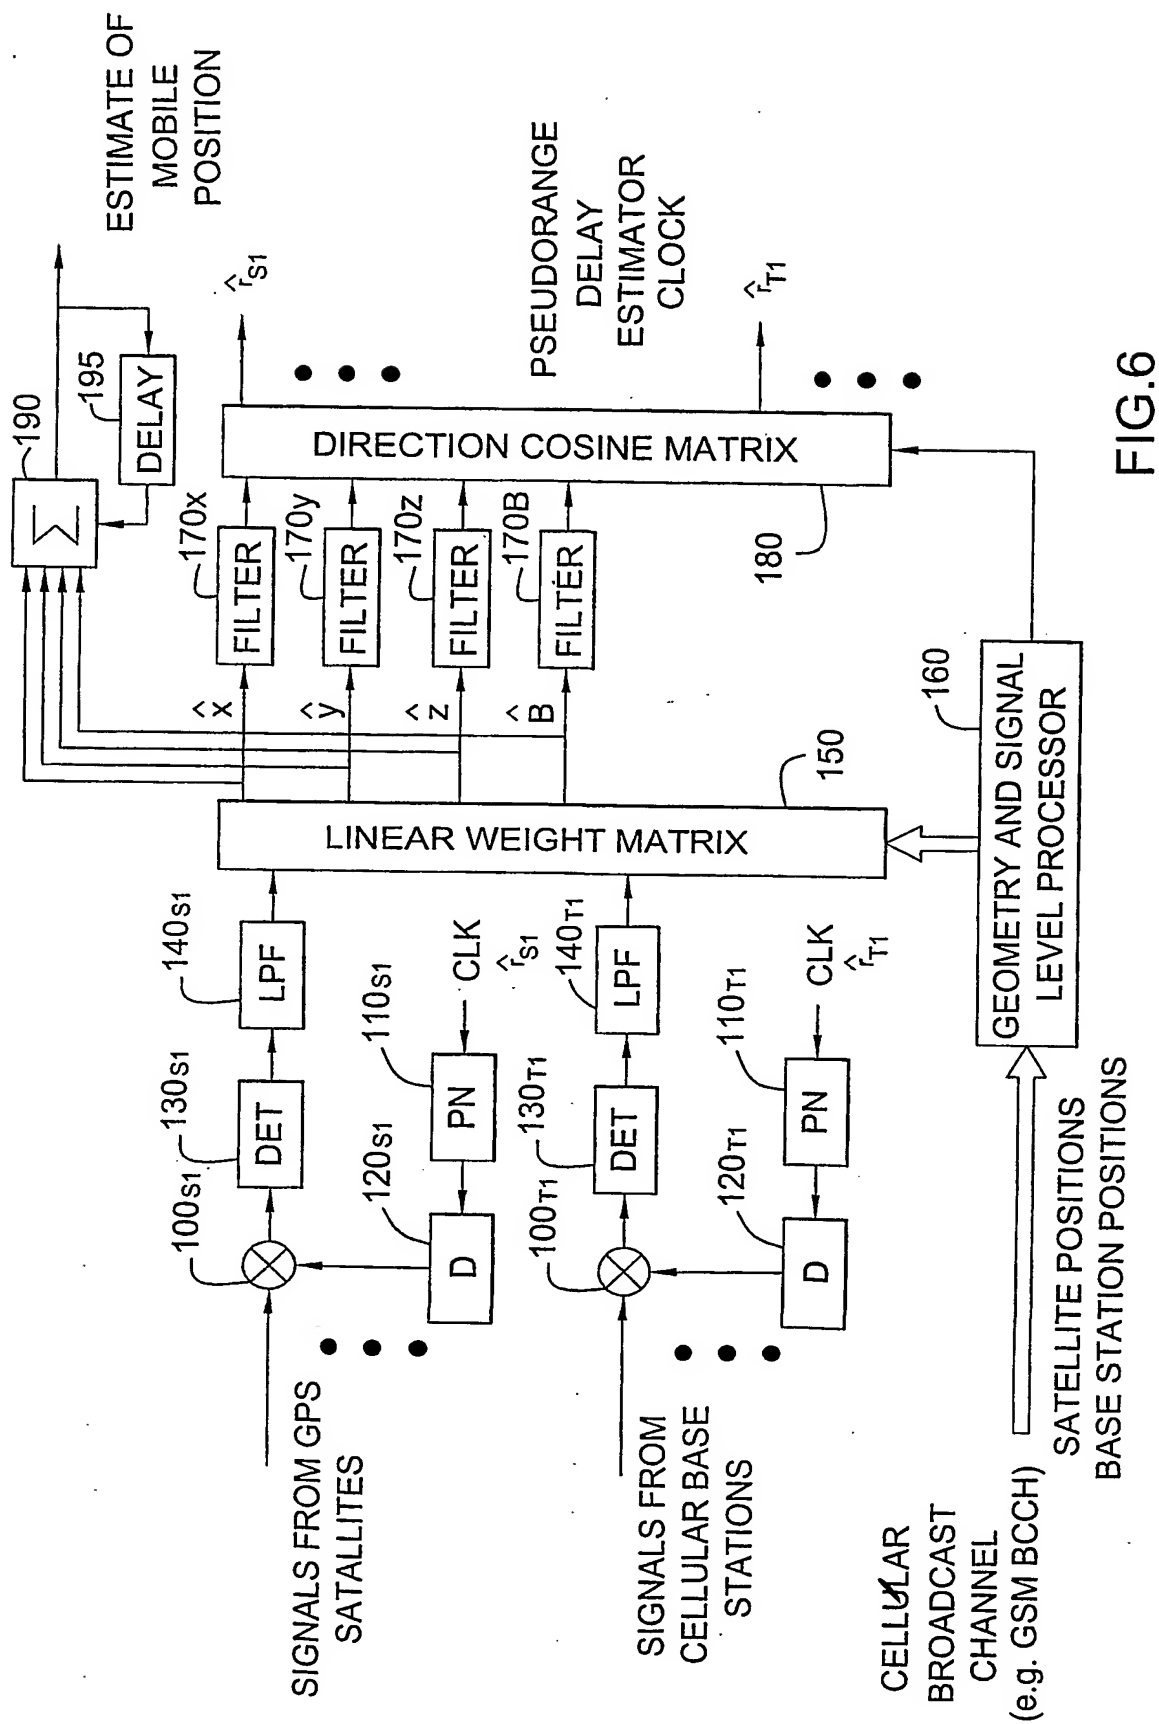


FIG. 6

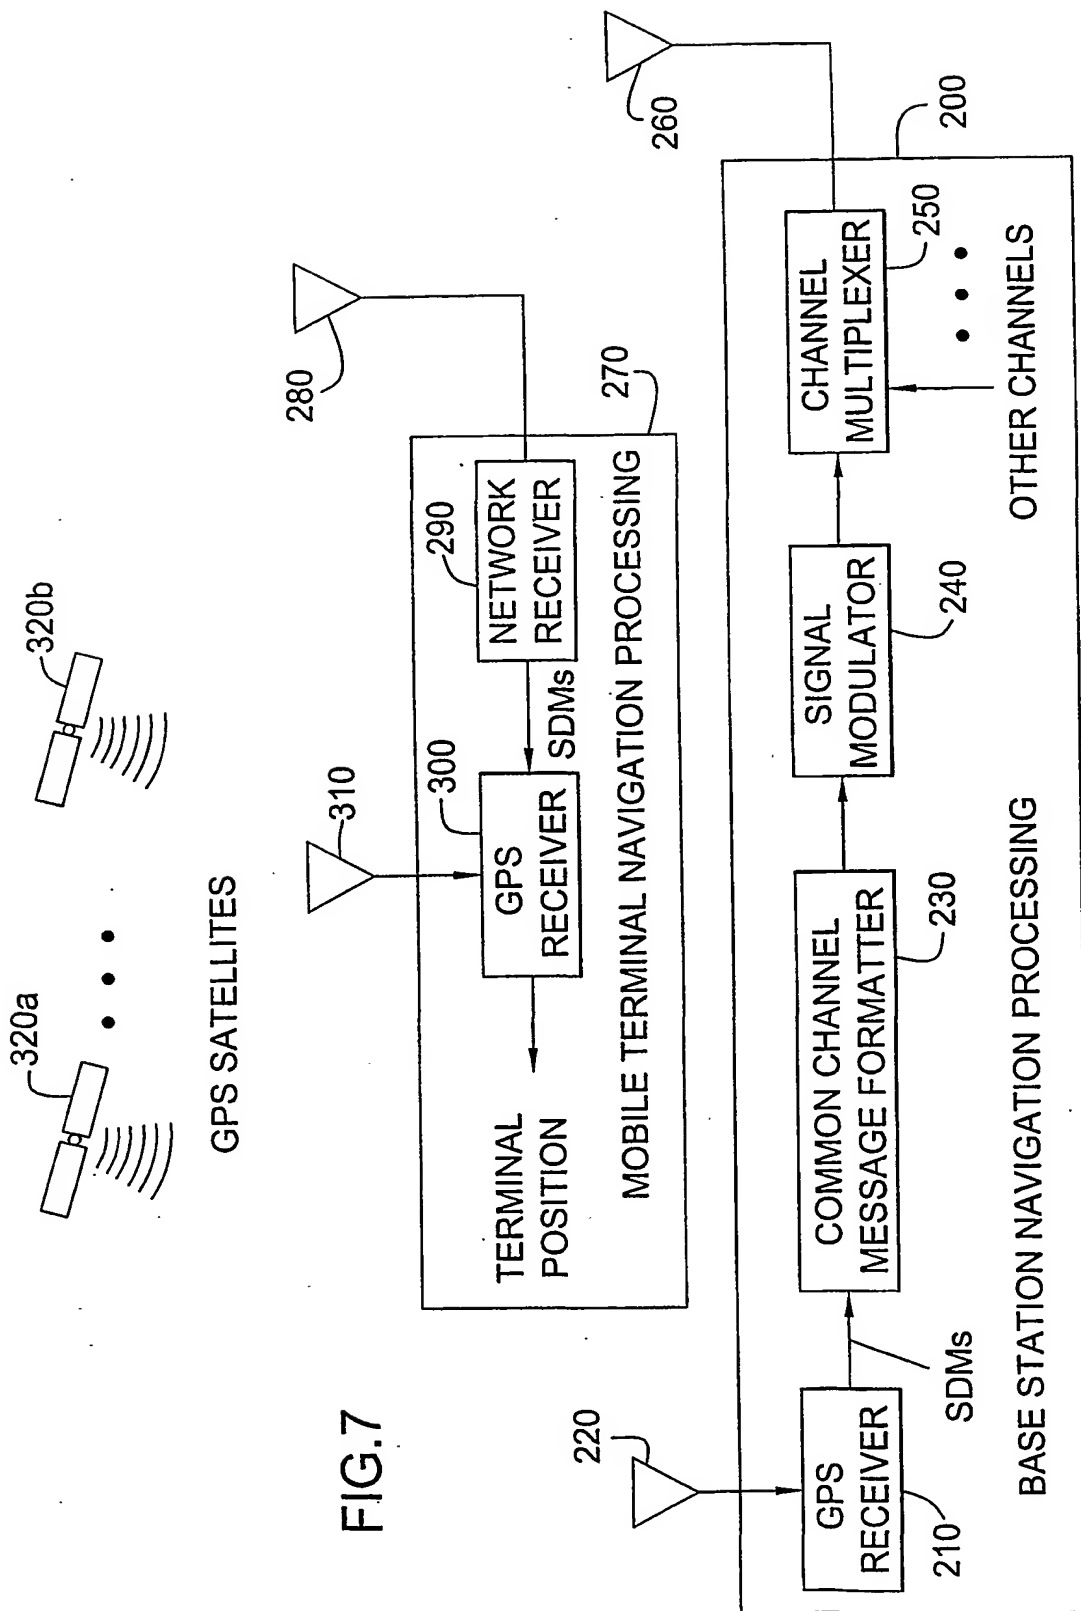


FIG. 7

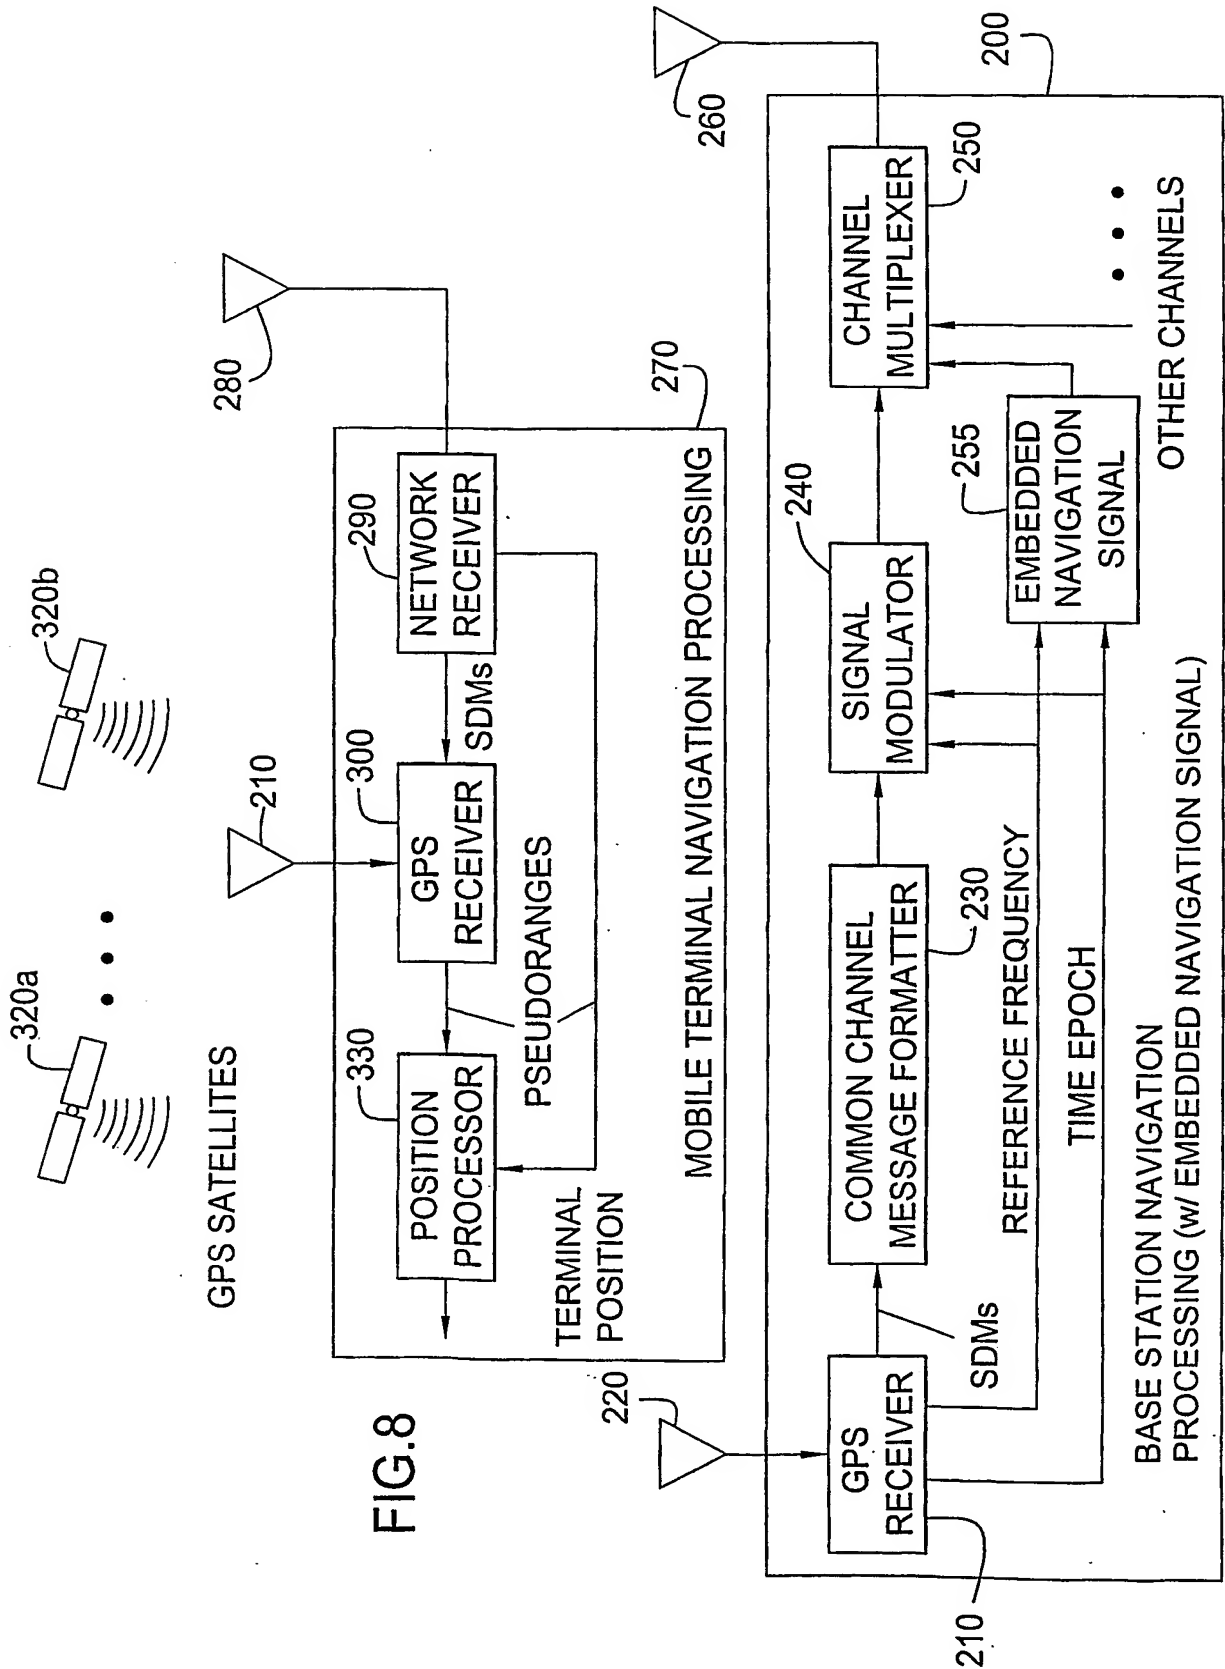


FIG. 8

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 September 2002 (06.09.2002)


PCT

(10) International Publication Number
WO 02/068985 A3

- (51) International Patent Classification⁷: **G01S 5/14** (74) Agents: **LYTLE, J., Warren, Jr.** et al.; Epstein, Edell, Shapiro, Finnan & Lytle, LLC, Suite 400, 1901 Research Boulevard, Rockville, MD 20850 (US).
- (21) International Application Number: **PCT/US02/03410**
- (22) International Filing Date: 27 February 2002 (27.02.2002) (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/271,764 27 February 2001 (27.02.2001) US
- (71) Applicant (*for all designated States except US*): **ITT MANUFACTURING ENTERPRISES, INC.** [US/US]; Suite 1217, 1105 North Market Street, Wilmington, DE 19801 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (*for US only*): **BRUNO, Ronald, C.** [US/US]; 4128 Lorcom Lane, Arlington, VA 22207 (US). **SCHUCHMAN, Leonard** [US/US]; 11054-7 Hill Lane, Potomac, MD 20854 (US).
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: HYBRID SYSTEM FOR POSITION DETERMINATION BY A MOBILE COMMUNICATIONS TERMINAL

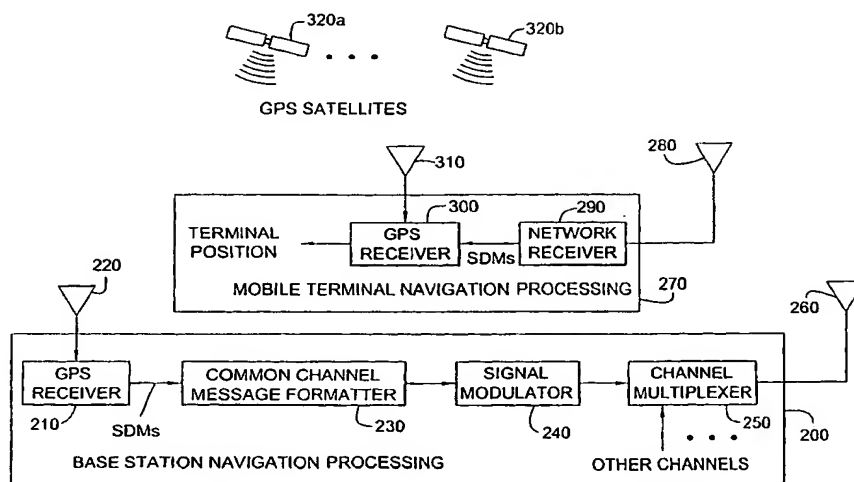

(57) Abstract: A mobile unit includes a network receiver, such as a GSM telephone, for communication with a wireless network, and a navigation receiver, such as a global positioning system (GPS) receiver for receiving navigation signals. The navigation receiver includes a vector delay lock loop (VDLL) that receives information concerning the navigation sources, such as satellite data messages, transmitted over a common broadcast channel of the wireless network, and receives navigation signals from the navigation receiver. The VDLL uses the navigation signals received from navigation sources that are not obscured and uses satellite data messages broadcast over the wireless network to track a navigation signal that is received only intermittently due, for example, to the navigation source being obscured from view of the mobile unit.



WO 02/068985 A3



— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(88) Date of publication of the international search report:

31 October 2002

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 02/03410

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G01S5/14

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01S

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 365 450 A (SCHUCHMAN LEONARD ET AL) 15 November 1994 (1994-11-15) column 4, line 8 - line 46	1,2,5, 12,28
Y	column 7, line 5 - line 27; claim 11 ---	3,4,6,7, 16,22
Y	US 5 398 034 A (SPILKER JR JAMES J) 14 March 1995 (1995-03-14) cited in the application the whole document ---	3,16,22
Y	WO 99 66342 A (ERICSSON INC) 23 December 1999 (1999-12-23) page 8, line 16 -page 9, line 4 ---	4,6
Y	WO 00 34800 A (ERICSSON INC) 15 June 2000 (2000-06-15) abstract ---	7
	--- -/--	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

22 August 2002

Date of mailing of the international search report

05/09/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Niemeijer, R

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 02/03410

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>PARKINSON B W ET AL: "GLOBAL POSITIONING SYSTEM: THEORY AND APPLICATIONS" , GLOBAL POSITIONING SYSTEM: THEORY AND APPLICATIONS, PROGRESS IN ASTRONAUTICS AND AERONAUTICS VOL. 163, WASHINGTON, DC: AIAA, US, VOL. VOL. II, PAGE(S) 292-301 XP002210531 ISBN: 1-56347-107-8 figures 33,34</p>	1,16,28
A	<p>WO 99 63358 A (SMALL DAVID ;COMMUNICATIONS PTY LTD Q (AU)) 9 December 1999 (1999-12-09) abstract; figure 4 page 12, line 28 - line 35 page 15, line 24 - line 34</p>	1,16,28

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 02/03410

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5365450	A	15-11-1994	AU 6226794 A	19-07-1994
			BR 9307686 A	08-09-1999
			CA 2152052 A1	07-07-1994
			WO 9415412 A1	07-07-1994
			US 5422813 A	06-06-1995
			US 5726893 A	10-03-1998
US 5398034	A	14-03-1995	AU 6492094 A	24-10-1994
			JP 9501228 T	04-02-1997
			WO 9423505 A1	13-10-1994
WO 9966342	A	23-12-1999	AU 4200899 A	05-01-2000
			BR 9911303 A	13-03-2001
			CN 1312913 T	12-09-2001
			EE 200000751 A	15-04-2002
			EP 1095292 A1	02-05-2001
			JP 2002518684 T	25-06-2002
			TR 200003711 T2	20-04-2001
			WO 9966342 A1	23-12-1999
WO 0034800	A	15-06-2000	AU 2022100 A	26-06-2000
			CN 1334925 T	06-02-2002
			EP 1149303 A1	31-10-2001
			TW 452656 B	01-09-2001
			WO 0034800 A1	15-06-2000
WO 9963358	A	09-12-1999	AU 749029 B2	13-06-2002
			AU 4024899 A	20-12-1999
			WO 9963358 A1	09-12-1999
			CN 1305592 T	25-07-2001
			EP 1076833 A1	21-02-2001
			JP 2002517731 T	18-06-2002

THIS PAGE BLANK (USPTO)